


Steilkegel SK 30, SK 40

Form 220 – 230


Austauschbare feste Zentrierspitzen, durchgehärtet, Rundlaufabweichung max. 0,004 mm, für wälzgelagerte Reitstockpinolen.

Kegelform	Steilkegel	Gruppe	Bestell-Nr.	D	d	d2	LC	LA	L	
220 passend für Index	SK 30	A	2230.10A-130	10		32,5	61,6		130	
			2230.10A-150	10		32,5	81,6		150	
		B	2230.09B-120	9		32,5	51,6	17	120	
			2230.13B-125	13		32,5	56,6	27	125	
			2230.19B-135	19		32,5	66,6	57	135	
			2230.25B-145	25		32,5	76,6	67	145	
		C	2230.36C-116	36				47,6		116
			2230.36C-130	36				61,6		130
		D	2230.80x20D	80	20			71,6		140
			2230.125x65D	125	65			71,6		140
SK 40	C	2240.48C-152	48			59		152		
230 passend für FFG (MAG, Bohringer)	SK 30	A	2330.10A-130	10		32,2	61,6		130	
			2330.10A-150	10		32,2	81,6		150	
			2330.10A-170	10		32,2	101,6		170	
		B	2330.09B-120	9		32,2	51,6	17	120	
			2330.09B-150	9		32,2	81,6	17	150	
			2330.13B-125	13		32,2	56,6	27	125	
			2330.13B-170	13		32,2	101,6	27	170	
			2330.19B-135	19		32,2	66,6	50	135	
			2330.19B-170	19		32,2	101,6	50	170	
			2330.25B-145	25		32,2	76,6	63	145	
		C	2330.32C-116	32,2				47,6		116
			2330.32C-130	32,2				61,6		130
			2330.32C-150	32,2				81,6		150
			2330.32C-170	32,2				101,6		170
			2330.45C-130	45				61,6		130
		D	2330.80x20D	80	20			71,6		140
			2330.125x65D	125	65			71,6		140
		SK 40	C	2340.44C-152	44,9			58,6		152
				2340.44C-172	44,9			78,6		172
				2340.44C-200	44,9			106,6		200

Form 220
passend für Index




Form 230
passend für MAG (Bohringer)




Sonderformen, größere Steilkegel oder hartmetallbestückte Ausführungen fertigen wir nach Anforderung.


Gruppe A – Kopierspitze 60°/30°

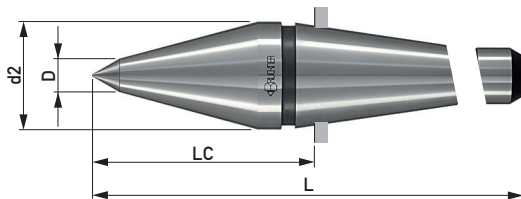

Gruppe B – Schlanke Spitze 60°

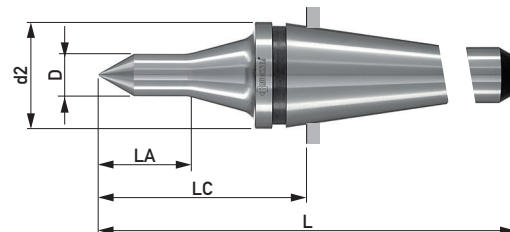

Gruppe C – Volle Spitze 60°

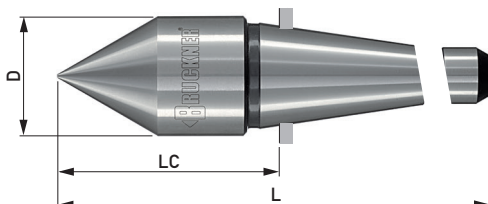

Gruppe D – Fester Zentrierkegel 60°

